



pvc- and halogen free



SILICONE BASED NTF

HIGH PERFORMANCE
RUBBER NTF


SILICONE SEALANTS

AIRLAM


DUROFLOOR®

- All-in-one light-weight NTF
- High performance rubber surface layer laminated to a 2-layer phenolic laminate backing (DAN407-7 standard)
- Fulfills low smoke and toxic gas emissions requirements according ABD0031
- Superior wear resistance
- Available in a wide color range
- With use of Floorsil® Silicone sealants no hot-welding required during installation


Layers

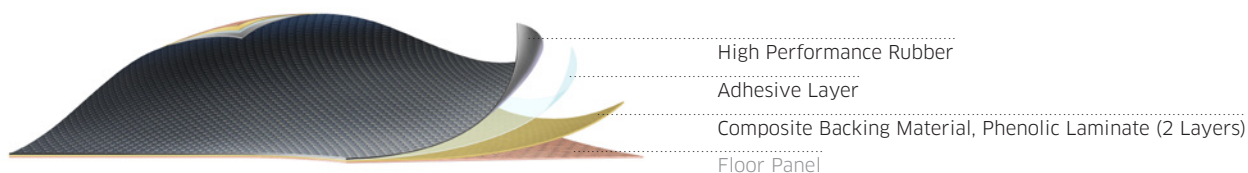


Selection of available designs




DA8 - 8 mm dots
asymmetrical arranged



DA19 - 19 mm dots
asymmetrical arranged



Ribbed
carpet design



Grained
random pattern

Selection of available colors

Colours may be different from actual due to reproduction variance.



Granite



Basalt Grey



Dark Grey



Dark Grey Luster



Dark Brown



Dark Sand



Pacific Blue



Amazonas Red

Contact Informations



For TDS and MSDS please see our webpage www.cooperstandardperformance.com
Please find contacts of our international distributors under www.cooperstandardperformance.com

Business Manager:
Mr. Henrik Jetter
Mobile: +49 (0) 174 302 8249
E-Mail: henrik.jetter@cooperstandard.com

Head Office:
Cooper Standard Technical Rubber GmbH
Fred-Joachim-Schoeps-Straße 55
68535 Edingen-Neckarhausen, Germany
Tel.: +49 (0) 621 480280-302
Fax: +49 (0) 621 480280-240
E-Mail: aviationflooring@cooperstandard.com
web: www.cooperstandardperformance.com