

## Characteristics and features


- EPDM material, sulfur cured
- complies with VW 2.8.1 G50; VW 50180
- complies with DBL 5556.10
- non staining to varnishes
- nitrosamine free

## Technical data sheet

Polymer		DIN ISO 1629	EPDM
Colour			black
Temperature resistance	[°C]		-50°C - +100°C
Shore hardness	[ShA]	DIN 53 505 / ISO 7619	50 ± 5
Density	[g/cm <sup>3</sup> ]	DIN EN ISO 1183 / ISO 2781	1,17 ± 0,02
Tensile strength	[N/mm <sup>2</sup> ]	DIN 53 504 / ISO 37	approx. 9,0
Elongation at break	[%]	DIN 53 504 / ISO 37	approx. 600
Compression set *	[%]	DIN 53 517 / ISO 815	approx. 12,0
Ozone resistance **		ISO 1431-1	ozone resistant
Spec. volume resistance		DIN IEC 60093	antistatic

\* 24 h / 70 °C; \*\* 50 pphm, 40°C, 72 h, 20% Elongation

## Resistance

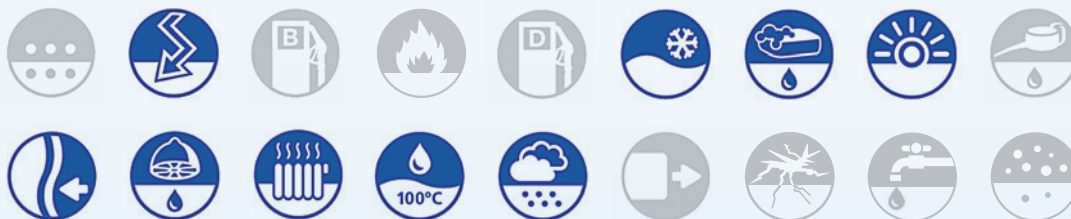

## Contact:

Product: A-KG 50-00  
Sales department  
[sheeting@cooperstandard.com](mailto:sheeting@cooperstandard.com)

Tel. +49 (0) 621- 480 280 266  
Fax. +49 (0) 621- 480 280 240  
[www.cooperstandard.com](http://www.cooperstandard.com)

Fred-Joachim-Schoeps-Str. 55  
68535 Edingen-Neckarhausen  
Germany

### Important information:

The listed test values and data are based on results of many years of development, tests and proving. A characteristics warranty and guaranteed function can't be derived from the information given. It is within the user's responsibility to test the selection of material in a specific application to ascertain his intended operational capability. Technical changes within the product development are subject to change.