

## Characteristics and features


- soft EPDM material for drinking water applications
- certification of KTW and DVGW W270
- in accordance with FDA 21§177.2600
- peroxide cured

## Technical data sheet

Polymer		DIN ISO 1629	EPDM
Colour			black
Temperature resistance	[°C]		-40°C - +130°C
Shore hardness	[ShA]	DIN 53 505 / ISO 7619	55 ± 5
Density	[g/cm <sup>3</sup> ]	DIN EN ISO 1183 / ISO 2781	1,07 ± 0,02
Tensile strength	[N/mm <sup>2</sup> ]	DIN 53 504 / ISO 37	approx. 7,5
Elongation at break	[%]	DIN 53 504 / ISO 37	approx. 200
Compression set *	[%]	DIN 53 517 / ISO 815	approx. 4,0
Ozone resistance **		ISO 1431-1	ozone resistant
Spec. volume resistance		DIN IEC 60093	insulating

\* 24 h / 70 °C; \*\* 50 ppm, 40°C, 72 h, 20% Elongation

## Resistance

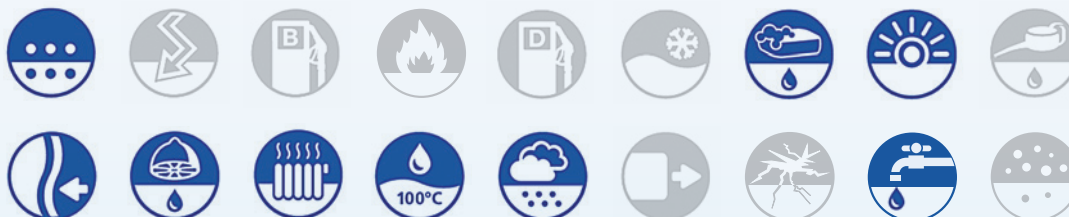

## Contact:

Product: A-KT 55-00  
 Sales department  
[sheeting@cooperstandard.com](mailto:sheeting@cooperstandard.com)

Tel. +49 (0) 621- 480 280 266  
 Fax. +49 (0) 621- 480 280 240  
[www.cooperstandard.com](http://www.cooperstandard.com)

Fred-Joachim-Schoeps-Str. 55  
 68535 Edingen-Neckarhausen  
 Germany

### Important information:

The listed test values and data are based on results of many years of development, tests and proving. A characteristics warranty and guaranteed function can't be derived from the information given. It is within the user's responsibility to test the selection of material in a specific application to ascertain his intended operational capability. Technical changes within the product development are subject to change.